

O.F.P VALVE WITH AUDIBLE ALARM

Features

Combination of #1228 C&B 3X4 Overfill Prevention Valve and #1400 Audible Alarm allows for high level alarm and Overfill Prevention of an AST through one opening. The C&B 3X4 is mechanical in operation and reliably shuts off the fuel supply of an AST at a predetermined level. Combining the C&B 3X4 with the #1400 Audible Alarm helps meet current regulations for AST Overfill Prevention. Alarm is battery operated, intrinsically safe, and complies with NEMA requirements. 95 decibel alarm alerts delivery person when fluid in tank reaches the predetermined level. Level is adjustable for specific applications. Unit comes ready to install with C&B 3X4, Alarm, float switch and batteries. Alarm may also be ordered with #1313 sight gauge, (#1350), for complete liquid level monitoring and alarm.

Part No.	Size	Wt.lbs
01228-03-35AL	3"	15.0



1228 C&B 3X4 With Alarm





Clay & Bailey Mfg. Co. To: _____ Fax: _____

Overfill Prevention Ordering Worksheet From: _____

ROUND HORIZONTAL TANK HEIGHT	% SHUT-OFF	
	90% HEIGHT	95% HEIGHT
36"	30"	33"
40"	34"	36"
42"	35"	38"
48"	41"	43"
60"	51"	54"
72"	61"	65"
84"	71"	76"
96"	81"	87"
108"	91"	98"
120"	101"	109"

**2", 3", AND 4" FILL LIMITERS'
WORK SHEET FOR FILL PIPE
LENGTH**

RECTANGULAR TANK HEIGHT	%SHUT-OFF	
	90% HEIGHT	95% HEIGHT
36"	32"	---
40"	36"	---
42"	38"	40"
48"	43"	46"
60"	54"	57"
72"	65"	68"
84"	77"	82"
96"	88"	93"
108"	97"	103"
120"	108"	114"

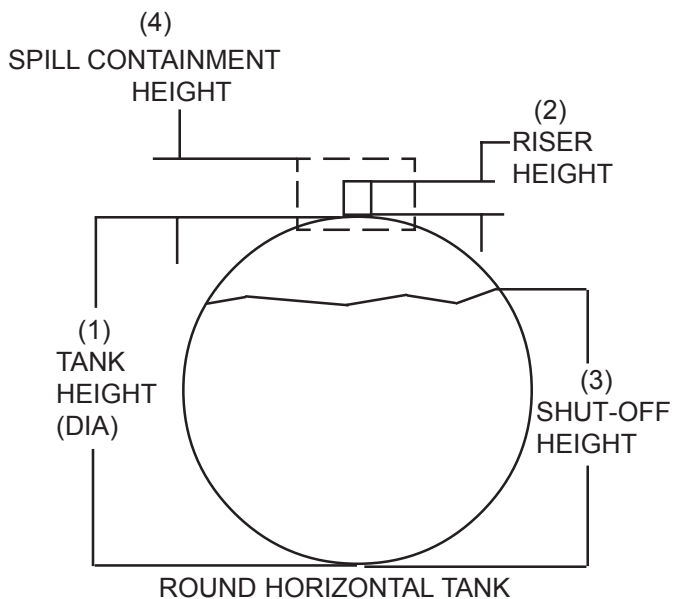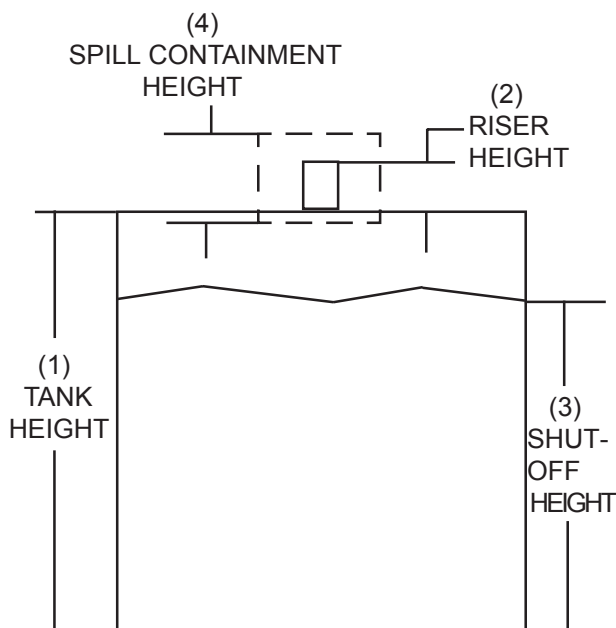

PLEASE COMPLETE THIS INFORMATION
USING DRAWINGS & CHARTS ON THIS PAGE

RECTANGULAR OR ROUND TANK? _____
 VERTICAL OR HORIZONTAL? _____
 HEIGHT OF PRIMARY TANK?(1) _____
 LENGTH OF 4" NIPPLE FROM PRIMARY TANK?(2) _____
 SHUT-OFF HEIGHT?(3) _____
 HEIGHT OF SPILL CONTAINMENT BOX?(4) _____

OPTIONS:

- INCLUDE DROP TUBE _____
- INCLUDE DRY BREAK ADAPTOR _____
- INCLUDE DRY BREAK COUPLER _____
- INCLUDE DRY BREAK CAP _____
- VITON GASKETS (BUNA-N STD.) _____