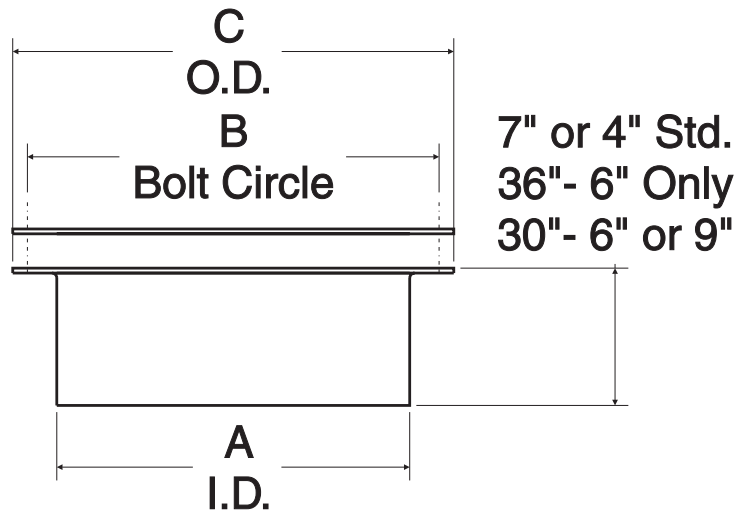


Features

Non-pressure manway suitable for installation on UST or AST. Standard material is 1/4" mild steel for the frame and lid. Options available are 5/16" lid, various frame heights, gaskets and hardware. Available in 304, 316 or 316L stainless steel, (3/16" thick).

**544 Manways**

*Part No.	Size	Wt.lbs	A	B	C	Hole Dia.	Single Punch #Holes	Double Punch #Holes
0544-09-1600	16"	46.0	16"	19"	20.5"	9/16"	16	32
0544-09-1800	18"	55.0	18"	21"	22.5"	9/16"	18	36
0544-09-2000	20"	63.0	20"	23"	24.5"	9/16"	20	40
0544-09-2100	20"	63.0	20"	23"	24.5"	9/16"	24	48
0544-09-2400	24"	80.0	24"	27"	28.5"	9/16"	24	48
0544-09-3000	30"	120.0	30"	33"	35.5"	9/16"	42	--
0544-09-3600	36"	171.0	36"	39"	42"	9/16"	52	--

*Part numbers for complete ring & cover single punched, with 1/4" lid.



Clay and Bailey Mfg. Co.