


# HATCHES

## Features

Lockable, fabricated dome suitable for 10" or 12" opening requirement. Without the standard 37X vent, this dome is excellent for inspection or filling.

Standard gasket material is NC757 with other gasket materials available. Unit can be fabricated in various collar heights. Non-wetted parts on aluminum and stainless units are made of plated mild steel.

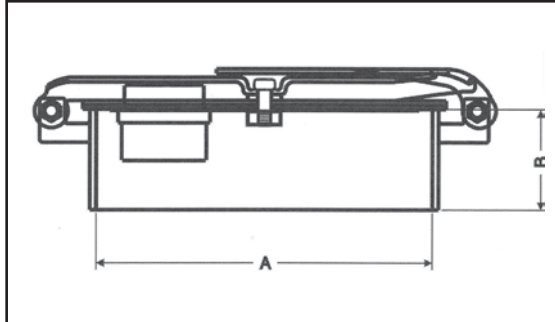

Part No.	Size	Wt.	A	B	Material
2097-03-1000	10"	11.0	10"	3"	Aluminum
2097-07-1000	10"	15.0	10"	3"	304SST*
2097-09-1000	10"	15.0	10"	3"	Mild Steel
2097-09-1015*	10"	15.0	10"	3"	Mild Steel
2097-09-1200	12"	18.0	12"	3"	Mild Steel
2097-09-1215*	12"	17.0	12"	3"	Mild Steel

\* Less Vent



**2097-541**


\* Parts in contact are 304 SS; all other parts are MS plated.

6401 E. 40th St. Kansas City, Missouri 64129  
2-03



1-816-924-3900 1-800-821-6583 FAX: 1-816-924-3903  
www.claybailey.com email: CandBmfg@claybailey.com

# HATCHES

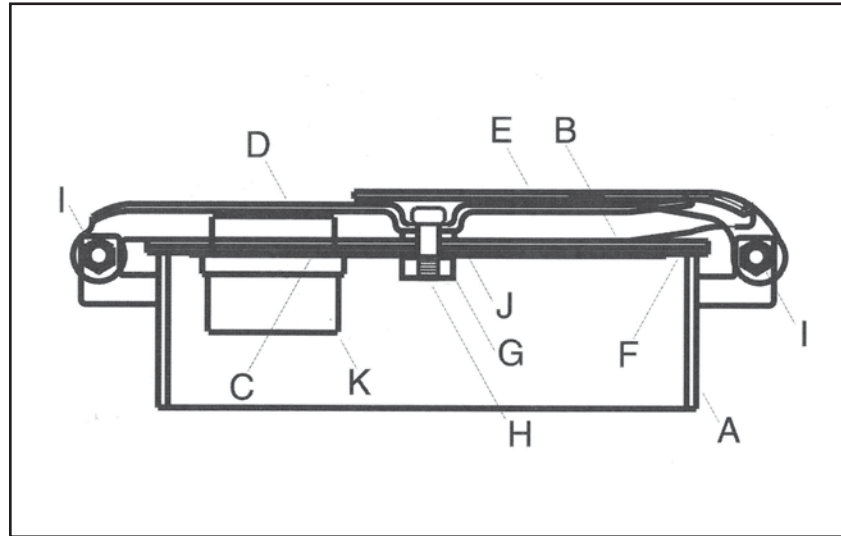

## 2097 Parts Listing

Part Number	Size	Description	Material	Qty.
A 2097-09-1001	10"	Collar	Mild Steel	1
B 2097-09-1602	10"	Plug Only (one vent opening)	Mild Steel	1
C 2097-09-1608	10"	Retainer (one vent opening)	Mild Steel	1
D 2097-09-1603		Hinge	Mild Steel	1
E 2097-09-1604		Cam	Mild Steel	1
F 2097-05-1012	10"	Gasket	NC757	1
G 1607-17-1618	3/8"	Hex Nut	Mild Steel Plated	1
H 2097-09-1616	3/8x1 1/2"	Hex Bolt	Mild Steel Plated	1
2097-17-1607	3/8"	Shim	Mild Steel Plated	1
I 1607-09-1608	3/8"x5"	Hex Bolt	Mild Steel Plated	2
1607-17-1618	3/8"	Hex Nut	Mild Steel Plated	2
J 2097-09-1605		Spacer	Mild Steel	1
K 0037-03-2030	2"	PV Vent	Aluminum	1