

EMERGENCY VENTS

NEW!  **LISTED!**



366

Emergency Vent Airflow Capacity Chart

SCFH=Standard Cubic Feet Per Hour @ 2.5 psig

Screens are standard 4 mesh galvanized steel.


Clay & Bailey emergency vents are flow tested and UL listed.

Part No.	Size A NPT	Wt.lbs	B
0366-01-4000	4"	17.6	5 3/16"
0366-01-5000	5"	22.0	5 3/4"
0366-01-6000	6"	27.6	6 1/4"
0366-03-4000*	4"	10.2	5 3/16"
0366-03-5000*	5"	20.0	5 3/4"
0366-03-6000*	6"	19.3	6 1/4"

*Aluminum Base

Features

Slimline style is ideal for limited space situations. Durable cast iron top and base with aluminum bases available. Machined top and base with a Buna N "O" Ring provide a vapor tight seal. Air flow at 2.5psi is 91,076 SCFH for 4" with screen and 227,191 SCFH for 6" with screen. 4", 5" or 6" NPT female thread is standard.

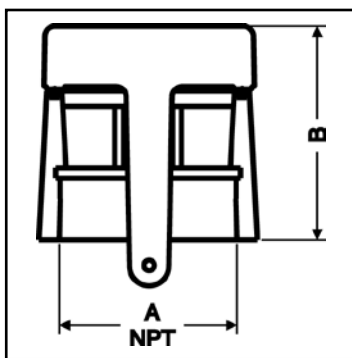

Size (inch)	Model	Flow w/o screen (CFH)	Flow w/ screen (CFH)
2	354-02-2000	19,218	17,707
3	367-03-30HF	71,750	66,400
3	366-03-30HF	71,750	66,400
3	365-03-3000	46,983	43,770
4	367-03-40HF	118,750	114,800
4	366-03-40HF	118,750	114,800
4	368-01-4000	89,641	77,415
4	369-01-4000	89,641	77,415
4	366-03-4000	105,460	91,076
4	367-03-4000	105,460	91,076
4	368-03-4000	89,641	77,415
4	369-03-4000	89,641	77,415
5	367-03-50HF	200,250	184,500
5	366-03-50HF	200,250	184,500
5	366-03-5000	194,725	171,300
5	367-03-5000	194,725	171,300
6	367-03-60HF	251,700	237,000
6	366-03-60HF	251,700	237,000
6	370-03-60HF	251,700	237,000
6	368-01-6000	227,988	210,527
6	369-01-6000	227,988	210,527
6	366-03-6000	267,284	227,191
6	367-03-6000	267,284	227,191
6	368-03-6000	227,988	210,527
6	369-03-6000	227,988	210,527
8	367-03-80HF	556,589	500,552
8	366-03-80HF	531,289	500,552
8	368-01-8000	501,305	455,413
8	369-01-8000	501,305	455,413
8	368-03-8000	501,305	455,413
8	369-03-8000	501,305	455,413
8	370-01-8000	332,040	324,423
8	370-03-8000	332,040	324,426
8	370-03-80HF	507,198	456,123
10	370-03-1000	496,103	483,340
10	370-03-10HF	715,724	712,828