

# Clay & Bailey Mfg. Co.



A CENTURY'S WORTH OF INNOVATION

## 01228-03-3524ALL Overfill Prevention Valve For Aboveground Storage Tanks



**3524ALL**

U.S. Patent #5,531,247

## Features

Designed for AST's requiring high GPM flow rate, having a 4" NPT opening. The 01228-03-3524ALL was designed to be custom fit in the field. The 3524ALL can easily install in a 4" opening. Flow rate is over 300 gallons per minute at 40 psi. The 01228-03-3524ALL is rated for fuel delivery up to 100 psi and provides positive fuel shut off at high fill rates. Entirely mechanical in operation, the 01228-03-3524ALL can be used in remote fill applications, retrofitted to an existing AST. The 3" NPT fill opening allows easy connection to piping or cam fittings.

Can be used in gravity filling installations as no minimum operating pressure is required.

Clay & Bailey Overfill Prevention Valves can be used in a variety of Aboveground Storage Tank Equipment installations where reliable fuel handling petroleum equipment is required.

### C&B 01228-03-3524ALL

#### Supplied With:

3" Cam Adaptor collar for a liquid tight fill connection.

1228-03-3054 3" Cam Lock Dust Cap

1228-03-5096 8 Ft Drop Tube


\*Applicable for fuels other than #5 and #6 fuel oils. Consult factory for special applications.



Now UL 2583 Listed



Clay & Bailey Overfill Prevention Valves comply with PEI RP200, RP600, UFC, IFC and Florida DEQ.

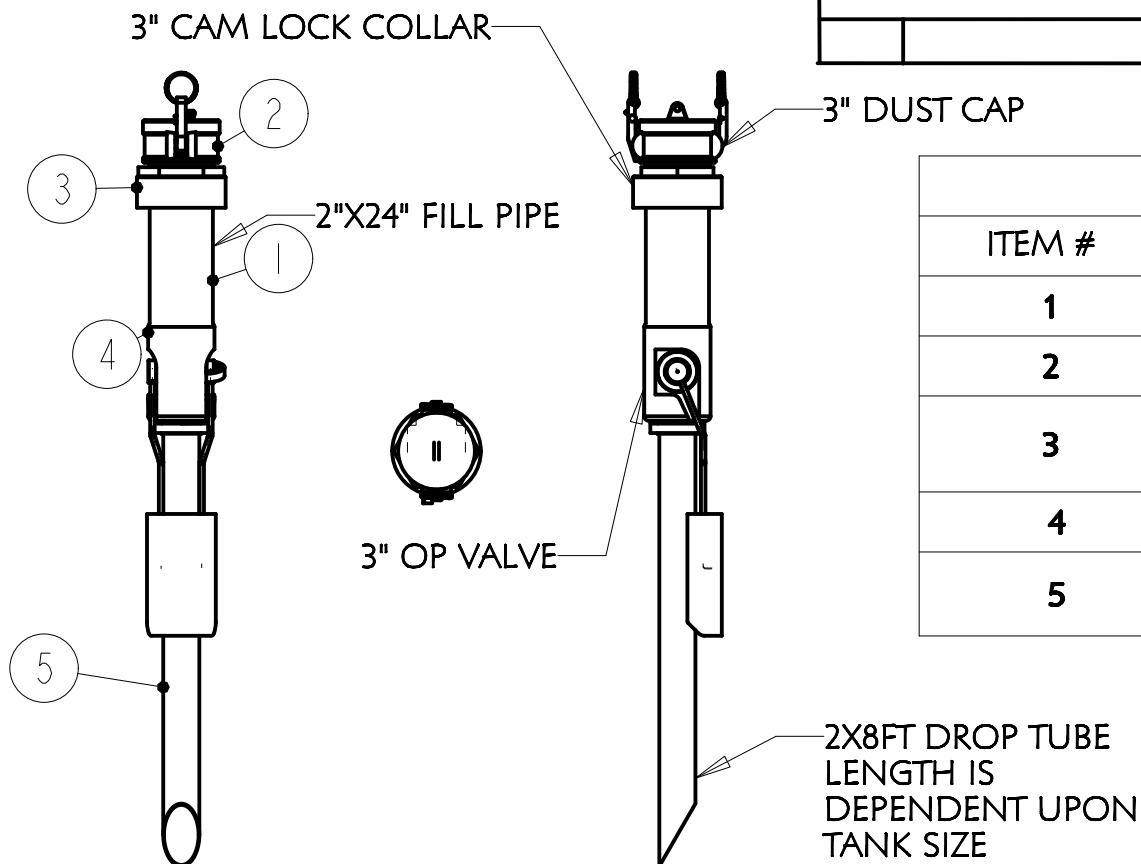

BILLS OF MATERIALS		
ITEM #	DESCRIPTION	PART #
1	24" FILL PIPE	O1228-O3-3O24
2	3" DUST CAP	O1228-O3-3O54
3	3" CAM LOCK COLLAR	O1228-O3-35O4
4	3" OP VALVE	O1228-O3-356O
5	2 X 8FT DROP TUBE	O1228-O3-5O96

TOLERANCES		MATERIAL:		CLAY & BAILEY MFG. CO.					
X +/- 0.1 XX +/- 0.03 XXX +/- 0.010 XXXX +/- 0.0005				NAME:					
ANGLES +/- 0.5°				3" ALL FILL LIMITER W/ CAMLOCK					
		WT:		DRAWN BY:		DWG:		REV.	
				K.O.		O1228-O3-3524ALL			
SCALE:		APPROVED:		DATE:		01/11/17		SHEET OF	