

# Clay & Bailey Mfg. Co.



A CENTURY'S WORTH OF INNOVATION

## 01228-03-3525 ALL Overfill Prevention Valve For Aboveground Storage Tanks



**3525ALL**

U.S. Patent #5,531,247

## Features

Designed for AST's requiring high GPM flow rate, having a 4" NPT opening. The 01228-03-3525ALL was designed to be custom fit in the field. The 3525ALL can easily install in a 4" opening. Flow rate is over 300 gallons per minute at 40 psi. The 01228-03-3525ALL is rated for fuel delivery up to 100 psi and provides positive fuel shut off at high fill rates. Entirely mechanical in operation, the 01228-03-3525ALL can be used in remote fill applications, retrofitted to an existing AST. The 3" NPT fill opening allows easy connection to piping or cam fittings.

Can be used in gravity filling installations as no minimum operating pressure is required.

Clay & Bailey Overfill Prevention Valves can be used in a variety of Aboveground Storage Tank Equipment installations where reliable fuel handling petroleum equipment is required.

C&B 01228-03-3525ALL

Supplied With:

3" Male threaded collar for connection to piping.

1228-03-5096 8 Ft Drop Tube


\*Applicable for fuels other than #5 and #6 fuel oils. Consult factory for special applications.



Now UL 2583 Listed



Clay & Bailey Overfill Prevention Valves comply with PEI RP200, RP600, UFC, IFC and Florida DEQ.

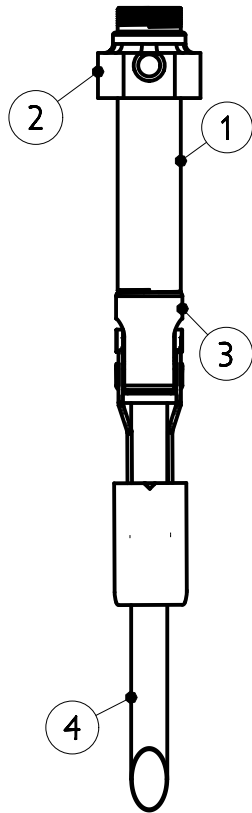

3" DRAIN BACK COLLAR



3" OP VALVE

24" FILL PIPE

2X8FT DROP TUBE  
NEED TO DETERMINE LENGTH

BILLS OF MATERIALS

ITEM #	DESCRIPTION	PART #
1	24" FILL PIPE	O1228-03-3024
2	3" DRAIN BACK COLLAR	O1228-03-3502
3	3" OP VALVE	O1228-03-3560
4	2 X 8FT DROP TUBE	O1228-03-5096

TOLERANCES
X +/- 0.1
XX +/- 0.03
XXX +/- 0.010
XXXX +/- 0.0005
ANGLES +/- 0.5°

MATERIAL:

CLAY & BAILEY MFG. CO.

NAME

3" ALL FILL LIMITER W/ DRAIN BACK COLLAR

THIS DRAWING AND CONCEPTS DISCLOSED THEREON BELONG EXCLUSIVELY TO CLAY & BAILEY WHOSE PROPRIETARY RIGHTS THEREIN SHALL NOT BE APPROPRIATED IN WHOLE OR IN PART WITHOUT WRITTEN CONSENT.

WT:

SCALE:

DRAWN BY:	K.O.	DWG:	O1228-03-3525ALL	REV.
APPROVED:	DATE: 01/12/17	SHEET OF		