

Pressure / Vacuum Vents



Features:


The Pressure / Vacuum vent is designed to provide pressure and vacuum relief in underground storage tanks (UST) and above ground storage tanks (AST).

The pressure / vacuum (P/V) vents incorporate three (3) separate valves to control over-pressure and vacuum conditions that arise in storage tanks. The three (3) valve system provides the necessary protection and durability needed in UST and AST vent caps.

The over pressure valve and vacuum valve is diaphragm operated and provides ten (10) times more sealing force than gravity devices. It consistently opens at pressure or vacuum setting.

Part #	Press./Vac.	Weight/lbs.
0089-03-8060	4.6 - 6.9 OZ. / 3.5 - 4.6 OZ.	1.2



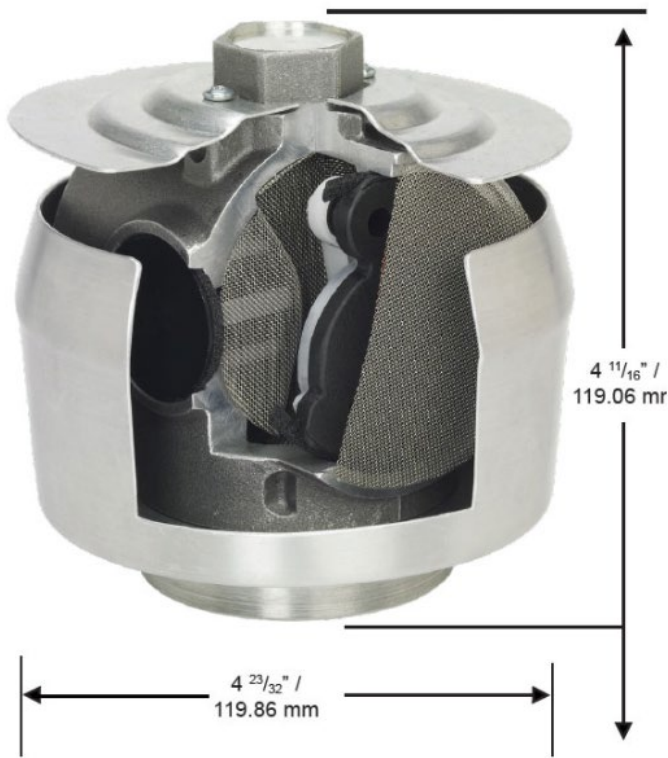

Features:

The safety over-pressure valve is designed to handle high pressure / high flow conditions. This valve will vent up to 7900 SCFH at 2 psi.

Threaded vent cap that is easily installed by using the cast-on hex nut which allows tightening without having to go between vent pipes.

Constructed from materials 100% compatible with B0-B20 and E0-E85.

Designed to fit a 2" Female NPT connection.

<u>Part #</u>	<u>Press./Vac.</u>	<u>Weight/lbs.</u>
0089-03-8060	4.6 - 6.9 OZ. / 3.5 - 4.6 OZ.	1.2



Clay & Bailey Mfg. is an authorized dealer of BJE

2/9/2021