

# Clay & Bailey Mfg. Co.



A CENTURY'S WORTH OF INNOVATION

## Manhole for Pneumatic Conveying Installations




1607

### Features:

Durable, full opening access manhole ideal for nonpressure applications. Strong back channel hinge design provides secure closure. Various collar heights available. Standard gasket material is Hi-Temp (200 degree F operating temperature), with other gasket materials available.

Part No.	Size	Material Wt.
1607-03-1660	16" Aluminum	20.0
1607-03-1860	18" Aluminum	22.0
1607-07-1660	16" 304 Stainless	31.0*
1607-07-1860	18" 304 Stainless	35.0*
1607-07-2000	20" 304 Stainless	45.0*
1607-07-2460	24" 304 Stainless	55.0*
1607-09-1660	16" Mild Steel	31.0*
1607-09-1860	18" Mild Steel	35.0
1607-09-2060	20" Mild Steel	45.0
1607-09-2400	24" Mild Steel	55.0

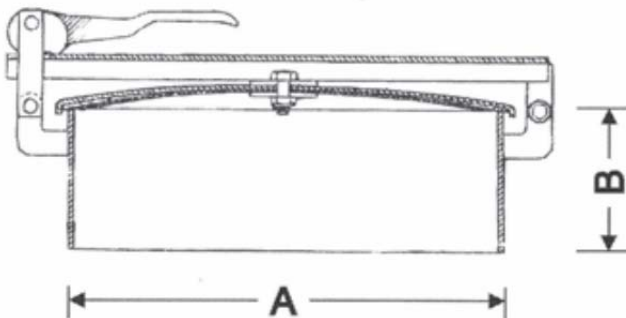

Size	A	B
16"	17.125"	6"
18"	19.125"	6"
20"	20.375"	6"
24"	24.375"	6"

\*Parts not in contact are mild steel plated

### Maintenance Note:

Check gaskets periodically for cracking or UV damage, replace if necessary.

