

Clay & Bailey Mfg. Co.



A CENTURY'S WORTH OF INNOVATION

Overfill Prevention Valve 3 X 4



#1228 C&B 3 x 4

U.S. Patent #5,531,247



Features

Designed for AST's requiring high GPM flow rate, but only having a 4" NPT opening. The C&B 3X4 has a 3" fill and easily installs in a 4" opening. Flow rate is over 300 gallons per minute at 40 psi. The C&B 3X4 is rated for fuel delivery up to 100 psi and provides positive fuel shut off at high fill rates. Entirely mechanical in operation, the C&B 3X4 can be used in remote fill applications, retrofitted to an existing AST, and has a unique drain back system designed to allow the delivery hose to be emptied after fuel delivery has been stopped. The 3" NPT fill opening allows easy connection to piping or cam fittings. The optional adjustable collar allows custom installation to any type of AST and allows various fuel shut off levels. Clay & Bailey Overfill Prevention Valves can be used in a variety of Aboveground Storage Tank Equipment installations where reliable fuel handling petroleum equipment is required.

C&B 3X4 Options Part No. Description

01228-03-3053	3" Cam Lock Adaptor
01228-03-3054	3" Cam Lock Dust Cap
01228-03-5202C	3" Adjustable Collar

See C&B 2X4 Options for drop tubes

*Applicable for fuels other than #5 and #6 fuel oils. Consult factory for special applications.

Part No.	Size	Wt.lbs
01228-03-35XX	3"	15.0

Standard Fill Tube Sizes (many lengths available)

Part No.	Length
01228-03-3510	10"
01228-03-3516	16"
01228-03-3520	20"
01228-03-3524	24"





Clay & Bailey Overfill Prevention Valves comply with PEI RP200, RP600, UFC, IFC and Florida DEQ.

Clay & Bailey Mfg. Co. To: _____ Fax: _____
 Overfill Prevention Ordering Worksheet From: _____

ROUND HORIZONTAL TANK HEIGHT	% SHUT-OFF 90% HEIGHT	95% HEIGHT
36"	30"	33"
40"	34"	36"
42"	35"	38"
48"	41"	43"
60"	51"	54"
72"	61"	65"
84"	71"	76"
96"	81"	87"
108"	91"	98"
120"	101"	109"

RECTANGULAR TANK HEIGHT	%SHUT-OFF 90% HEIGHT	95% HEIGHT
36"	32"	---
40"	36"	---
42"	38"	40"
48"	43"	46"
60"	54"	57"
72"	65"	68"
84"	77"	82"
96"	88"	93"
108"	97"	103"
120"	108"	114"

2", 3", AND 4" FILL LIMITERS' WORK SHEET FOR FILL PIPE LENGTH

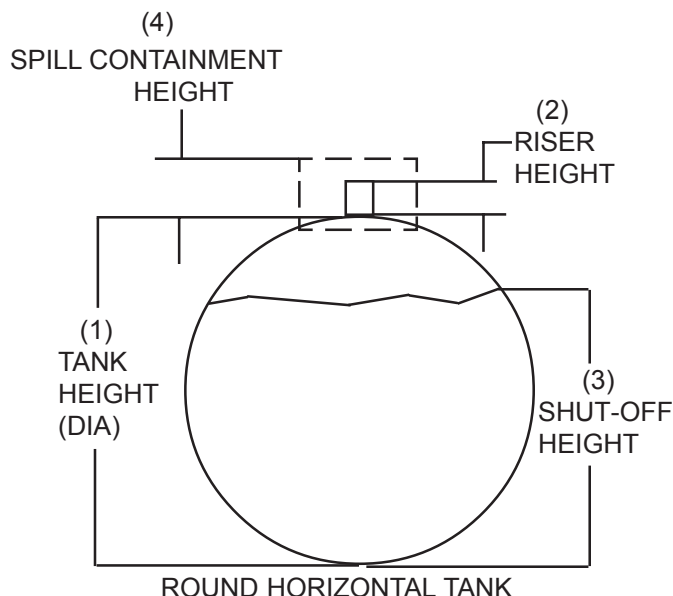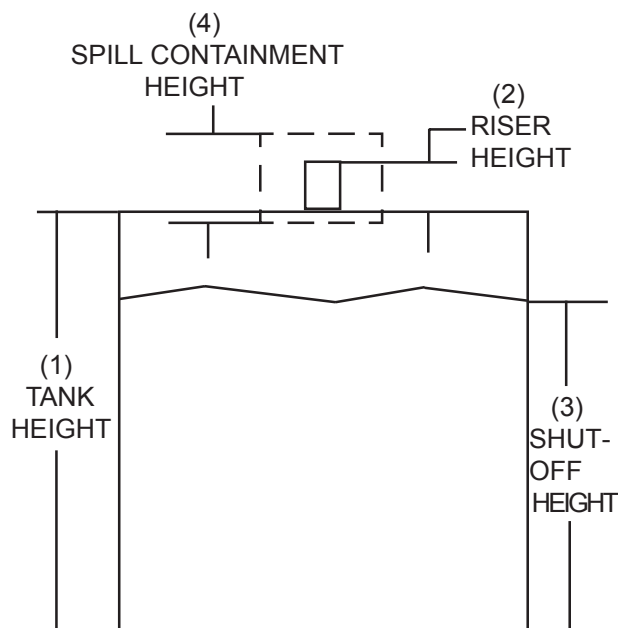

PLEASE COMPLETE THIS INFORMATION
USING DRAWINGS & CHARTS ON THIS PAGE

RECTANGULAR OR ROUND TANK? _____
 VERTICAL OR HORIZONTAL? _____
 HEIGHT OF PRIMARY TANK?(1) _____
 LENGTH OF 4" NIPPLE FROM PRIMARY TANK?(2) _____
 SHUT-OFF HEIGHT?(3) _____
 HEIGHT OF SPILL CONTAINMENT BOX?(4) _____

OPTIONS:

INCLUDE DROP TUBE _____
 INCLUDE DRY BREAK ADAPTOR _____
 INCLUDE DRY BREAK COUPLER _____
 INCLUDE DRY BREAK CAP _____
 VITON GASKETS (BUNA-N STD.) _____