


Manways



Features:

Manway suitable for installation on UST or AST. Standard material is mild steel for the frame and lid. Available in 304L or 316L stainless steel. Various lid and frame material thicknesses are available for either above or below liquid level service. Options include various frame heights, gasket materials and bolting hardware. Meets UL 142 Aboveground Flammable Liquid Tanks standard requirements.

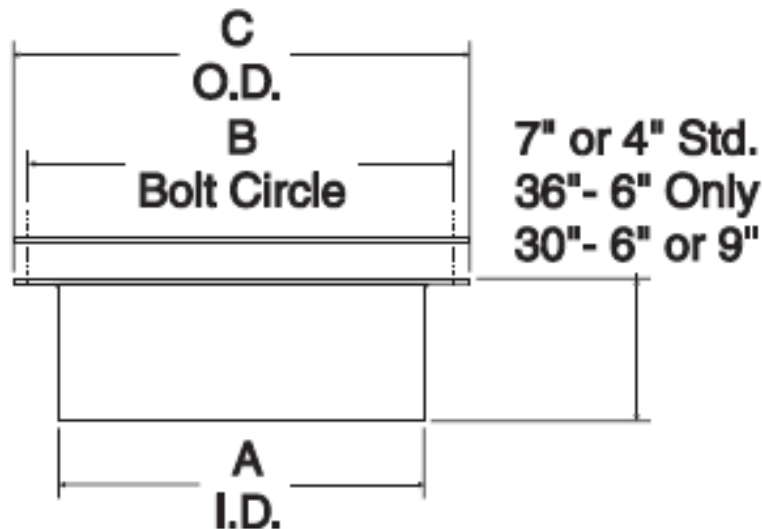

*Part No.	Size	Wt.lbs	A	B	C	Hole Dia.	Single Punch #Holes	Double Punch #Holes
0544-09-1600	16"	46.0	16"	19"	20.5"	9/16"	16	32
0544-09-1800	18"	55.0	18"	21"	22.5"	9/16"	18	36
0544-09-2000	20"	63.0	20"	23"	24.5"	9/16"	20	40
0544-09-2100	20"	63.0	20"	23"	24.5"	9/16"	24	48
0544-09-2400	24"	80.0	24"	27"	28.5"	9/16"	24	48
0544-09-3000	30"	120.0	30"	33"	35.5"	9/16"	42	—
0544-09-3600	36"	171.0	36"	39"	42"	9/16"	52	—

8/2020